


## Heat Shrinkable Outdoor Termination Kit Suitable for XLPE/EPR Cable

### Heat Shrinkable Outdoor Termination Kits Suitable for XLPE/EPR Cable


A wide range of high performance heat shrinkable termination kits of 11/22/33 kv range for 3 core XLPE cables. Superior in quality, these heat shrinkable termination kits are designed for cables of 12 KV to 36 KV. These shrinkable termination kits are easy to install and designed in compliance with international design standards.

#### Salient features:--


1. Simple and Fast Installation.
2. Fits a wide dimensional range reducing inventories.
3. High tracking resistance in harsh environmental conditions. Repeatable results
4. Unlimited shelf life.
5. Excellent weather & UV resistance.
6. Immediate energisation on completion.
7. Exceptional insulation & stress control properties.
8. Weight addition to cable negligible.

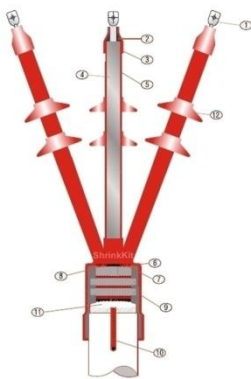

SHXO-11kV

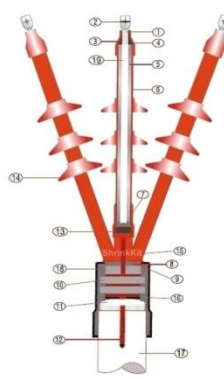

SHXO-22kV

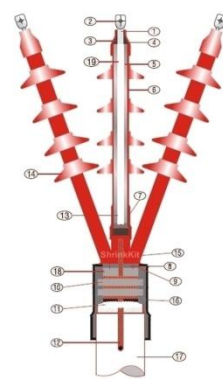

SHXO-33kV

Test Requirement	Electrical Performance		
	12KV (6.6/6.6KV,6.36/11KV)	15-24KV (8.7/15KV,11/11KV,12.7/22KV)	36KV (19/33KV)
A.C. Withstand, 1 Minute	35 KV	50KV	75KV
D.C. Withstand, 15 Minute	48KV	96KV	144KV
Discharge Extinction Voltage (<5Pc)	12.7 KV(Min)	25.4KV(Min)	38KV(Min)
Impulse Withstand (Crest KV)	75KV(Min)	125KV	170KV(Min)
Continuous Current Rating	As Per Cable	As Per Cable	As Per Cable

Ordering Information					
12 KV		15-24 KV		36 KV	
Cable Size (Sq mm)	Kit Code	Cable Size (Sq mm)	Kit Code	Cable Size (Sq mm)	Kit Code
16-35	SHXO-11	16-50	SHXO-21	35-70	SHXO-31
50-95	SHXO-12	70-120	SHXO-22	95-150	SHXO-32
120-185	SHXO-13	150-185	SHXO-23	185-300	SHXO-33
240-400	SHXO-14	240-400	SHXO-24	400	SHXO-34
400-500	SHXO-15				