


## Integral Union Connections

BHT manufactures a quality line of high-pressure integral union connections in a broad range of configurations and sizes from 2" and 3" and in pressure ratings to 15,000 psi NSCWP\*. Manufactured from high strength alloy steel, BHT integrals feature a lightweight design which is not found in competitors' products. All BHT integral union connections are subjected to controlled heat-treat process.

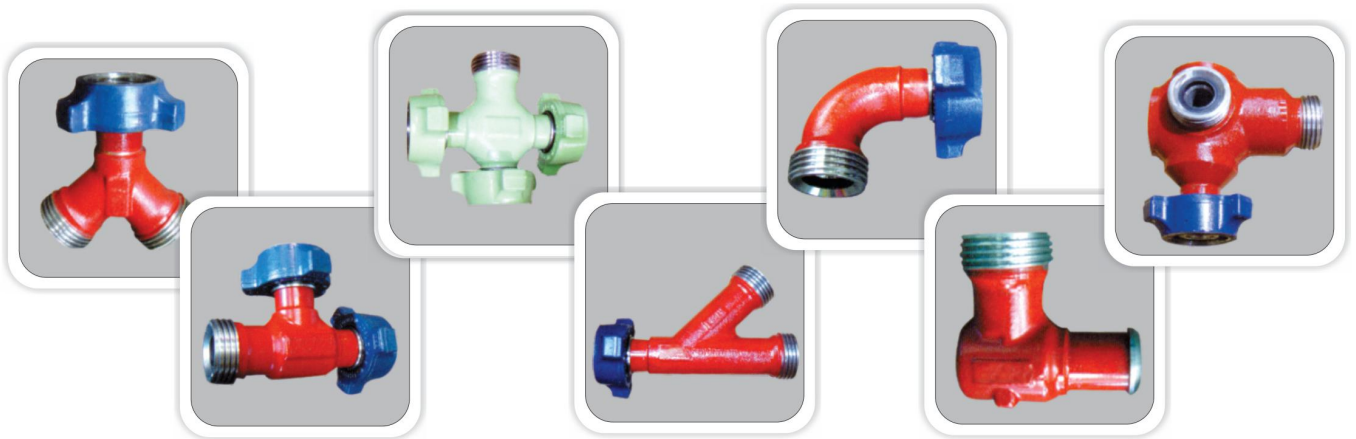

Size	Fig. 602 6,000 psi*	Fig. 1002 10,000 psi*	Fig. 1502 15,000 psi*	Fig. 1502 10,000 psi* H25	Fig. 2002 15,000 psi*	All Female (Thread)	All Male (Wing)	Combination styles and Sizes
2"			•	•	•	•	•	•
3"	•		•	•	•	•	•	•

\*Non-Shock Cold Working Pressure

### Union Changeover And Crossover Adaptors



Available in a variety of sizes and thread types in female-to-male, female-to-female, and male-to-male configurations from 1" thru 4", in pressure rating from 6,000 to 15,000 psi NSCWP\* in standard service, and up to 10,000 psi in sour gas service.

### Union Bull, Gauge And Lifting Bull Plugs



Available in a variety of sizes and thread types in female-to-male, female-to-female, and male-to-male configurations from 1" thru 4", in pressure rating from 6,000 to 15,000 psi NSCWP\* in standard service, and up to 10,000 psi in sour gas service.

### Union Male And Female To Pipe And Tubing Thread Swages



Available in numerous sizes and threaded configurations from 1" thru 4" in pressure rating from 6,000 to 10,000 psi NSCWP\*.