



TYPE ST-520

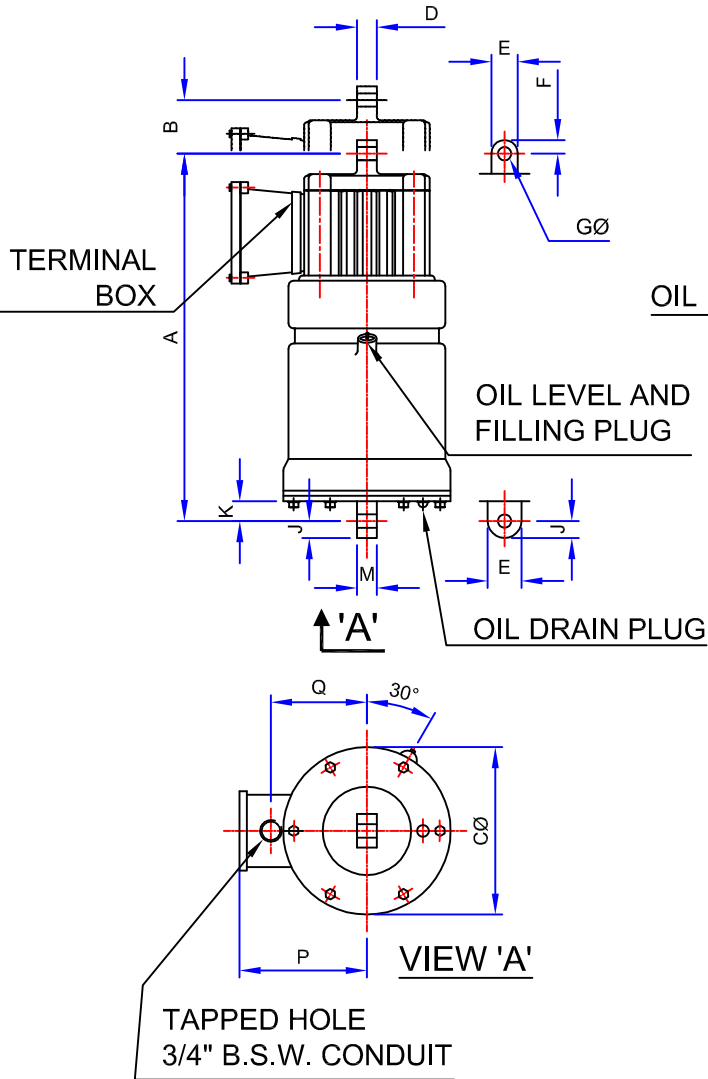

TYPE ST-535 - 8110

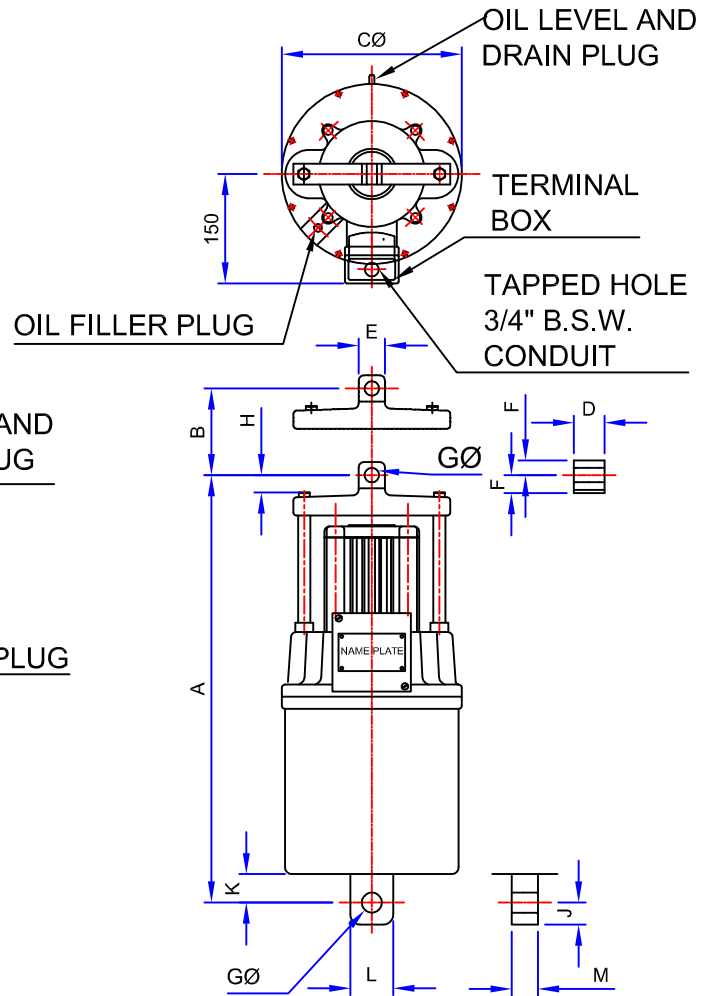

TYPE	RATED OUTPUT		INPUT WATTS	CURRENT DRAWN (AMP)	DIMENSIONS IN MM.														W.T. (KGS.)	OIL CAPACITY LITRES
	THRUST (KG.)	STROKE (MM.)			A	B	C	D	E	F	GØ	H	J	K	L	M	P	Q		
<i>Suni/ST 520</i>	18	50	90	0.25	350	50	160	22	28	13	12.7	19	16	19	35	20	121	90	14	2.0
<i>Suni/ST 535</i>	34	50	150	0.45	444	50	180	30	32	14	19	19	21	27	40	27	138	110	24	2.5
<i>Suni/ST 546</i>	46	50	180	0.55																
<i>Suni/ST 870</i>	68	76	170	0.80	508	75	216	30	32	16	19	25	24	29	48	30	152	124	35	4.5
<i>Suni/ST8110</i>	114	76	200	0.90																
<i>Suni/ST13200</i>	225	127	420	1.00	660	127	254	32	38	19	19	29	27	43	54	38	152	127	55	9.0
<i>Suni/ST13300</i>	295	127	580	1.20																

ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED.

Suni® Cranes Controls

AN ISO 9001:2015 CERTIFIED COMPANY



सनी क्रेन्स कन्ट्रोल्स

एन आय.एस.ओ.९००१:२०१५ सर्टीफाईड कम्पनी

Shubh Indl. Estate Vasai(E) PALGHAR-401208

ALL DIMENSIONS ARE IN MM.

TOL — OVERALL DIM ±5MM.
BOLTING CENTER ±3MM.

TITLE. **ELECTRO-HYDRAULIC THRUSTORS**
(RATING,DIMENSIONS AND WEIGHTS)

DRN.	PRAKASH	27/03/16	SCALE	N.T.S.
CHD.	G.G.YADAV	27/03/16	MATL.	ALUMINUM/CI
APPD.	G.G.YADAV	27/03/16	TYPE NO.	AS PER CHART
DRG. NO.	Suni / GA / Thrustor/05			REV — 0