
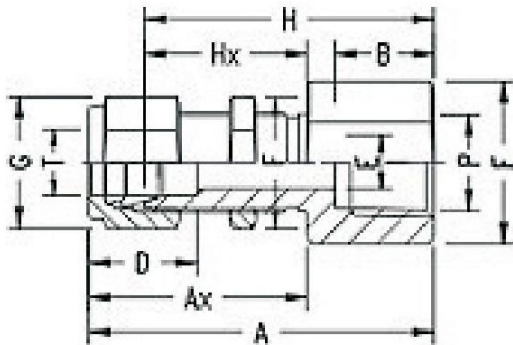


BULK HEAD FEMALE CONNENCTOR

INCH OD Tubes x Female NPT Threads

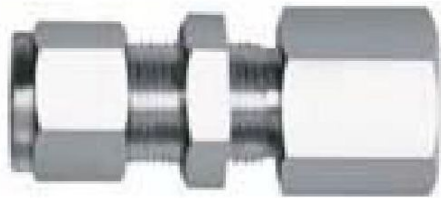

T Tube OD	P NPT Male	A	Ax	B	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness	FITRXCCEL PART NO.
1/8	1/8	44.7	31.2	10.4	12.7	2.4	14	11	38.1	24.6	8.3	12.7	BFC-365-N
1/4	1/4	47.0	33.5	10.4	15.3	4.8	16	14	39.7	26.2	11.5	10.2	BFC-366-N
1/8	1/4	51.5	33.5	15.0	15.3	4.8	19	14	44.2	26.2	11.5	10.2	BFC-367-N
3/8	1/4	54.8	36.8	15.0	16.8	7.1	19	17	47.5	29.5	14.7	11.2	BFC-368-N
1/2	3/8	61.7	41.9	15.0	22.9	10.4	22	22	51.6	31.0	19.5	12.7	BFC-369-N
1/2	1/2	66.7	41.9	19.8	22.9	10.4	27	22	56.6	31.0	19.5	12.7	BFC-370-N
5/8	1/2	67.6	42.7	19.8	22.9	12.7	27	25	57.4	32.5	22.6	12.7	BFC-371-N
3/4	1/2	72.4	47.5	19.8	24.4	16.0	35	28.5	62.3	37.4	25.8	16.8	BFC-372-N
3/4	3/4	74.7	47.5	20.6	24.4	16.0	35	28.5	64.3	37.4	25.8	16.8	BFC-373-N
1	3/4	84.3	57.4	20.6	31.2	16.0	35	38	72.1	45.2	33.7	19.0	BFC-374-N
1	1	93.2	57.4	25.4	31.2	22.2	35	38	81.0	45.2	33.7	119.0	BFC-375-N