


NISTUL



PIPE BEVELLING MACHINES



NISTUL MACHINES PVT.LTD.

TECHNICAL DATA SHEET

PIPE-2

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	20-42	20-42
IDLE SPEED	RPM	220	220
TORQUE	NM	42	30
FEEDING STROKE	MM	22	22
PNEUMATIC MOTOR POWER	HP	-	0.55
AIR CONSUMPTION	CFM	-	18-20
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	1/2"
ELECTRIC MOTOR POWER	WATT	850	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	5.8	5.0

FM-3000

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	28-76	28-76
IDLE SPEED	RPM	80	115
TORQUE	NM	80	55
FEEDING STROKE	MM	40	40
PNEUMATIC MOTOR POWER	HP	-	0.72
AIR CONSUMPTION	CFM	-	35-40
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	1/2"
ELECTRIC MOTOR POWER	WATT	1000	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	9.8	8.5

TECHNICAL DATA SHEET

PIPE-4

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	35-108	35-108
IDLE SPEED	RPM	80	70
TORQUE	NM	145	140
FEEDING STROKE	MM	40	40
PNEUMATIC MOTOR POWER	HP	-	1.35
AIR CONSUMPTION	CFM	-	55-60
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	1/2"
ELECTRIC MOTOR POWER	WATT	1000	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	10.5	9.5

PIPE-6

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	35-151	35-151
IDLE SPEED	RPM	80	50
TORQUE	NM	145	150
FEEDING STROKE	MM	40	40
PNEUMATIC MOTOR POWER	HP	-	1.35
AIR CONSUMPTION	CFM	-	55-60
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	1/2"
ELECTRIC MOTOR POWER	WATT	1000	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	11.5	10.5

TECHNICAL DATA SHEET

PIPE-8

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	49-203	49-203
IDLE SPEED	RPM	35	50
TORQUE	NM	265	252
FEEDING STROKE	MM	40	40
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	62-65
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	26.0	24.5

PIPE-12

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	100-306	100-306
IDLE SPEED	RPM	30	35
TORQUE	NM	232	185
FEEDING STROKE	MM	50	50
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	65-70
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	43.5	42.5

TECHNICAL DATA SHEET

PIPE-18

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	120-450	120-450
IDLE SPEED	RPM	16	16
TORQUE	NM	-	-
FEEDING STROKE	MM	50	50
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	65-70
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	150	150


PIPE-24

ELECTRIC

PNEUMATIC

LOCKING RANGE ID	MM	180-600	180-600
IDLE SPEED	RPM	12	12
TORQUE	NM	-	-
FEEDING STROKE	MM	50	50
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	65-70
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	75	75
UNIT WEIGHT	KG	250	250

OD CLAMPING 8-60 MM OD

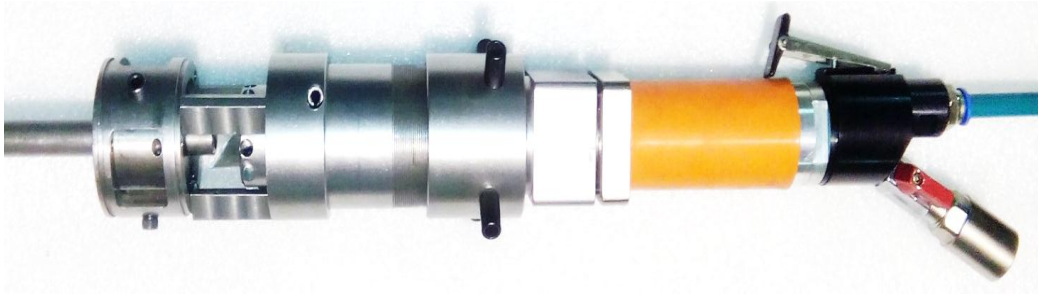

TECHNICAL DATA SHEET

PIPE -1.5

ELECTRIC PNEUMATIC


LOCKING RANGE ID	MM	8-30	8-30
IDLE SPEED	RPM	300	450
TORQUE	NM	105	95
FEEDING STROKE	MM	25	25
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	65-70
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	60	60
UNIT WEIGHT	KG	10.0	9.5

PIPE -2.5

ELECTRIC PNEUMATIC

LOCKING RANGE ID	MM	25-60	25-60
IDLE SPEED	RPM	300	450
TORQUE	NM	105	95
FEEDING STROKE	MM	25	25
PNEUMATIC MOTOR POWER	HP	-	1.85
AIR CONSUMPTION	CFM	-	65-70
AIR PRESSURE	BAR(PSI)	-	6 (90)
AIR HOSE CONNECTION	BSP	-	3/4"
ELECTRIC MOTOR POWER	WATT	1100	-
VOLTAGE	VOLT	220/110	-
FREQUENCY	Hz	50	-
MAX NOISE LEVEL	dB	60	60
UNIT WEIGHT	KG	13.0	12.5

TOOL BITS

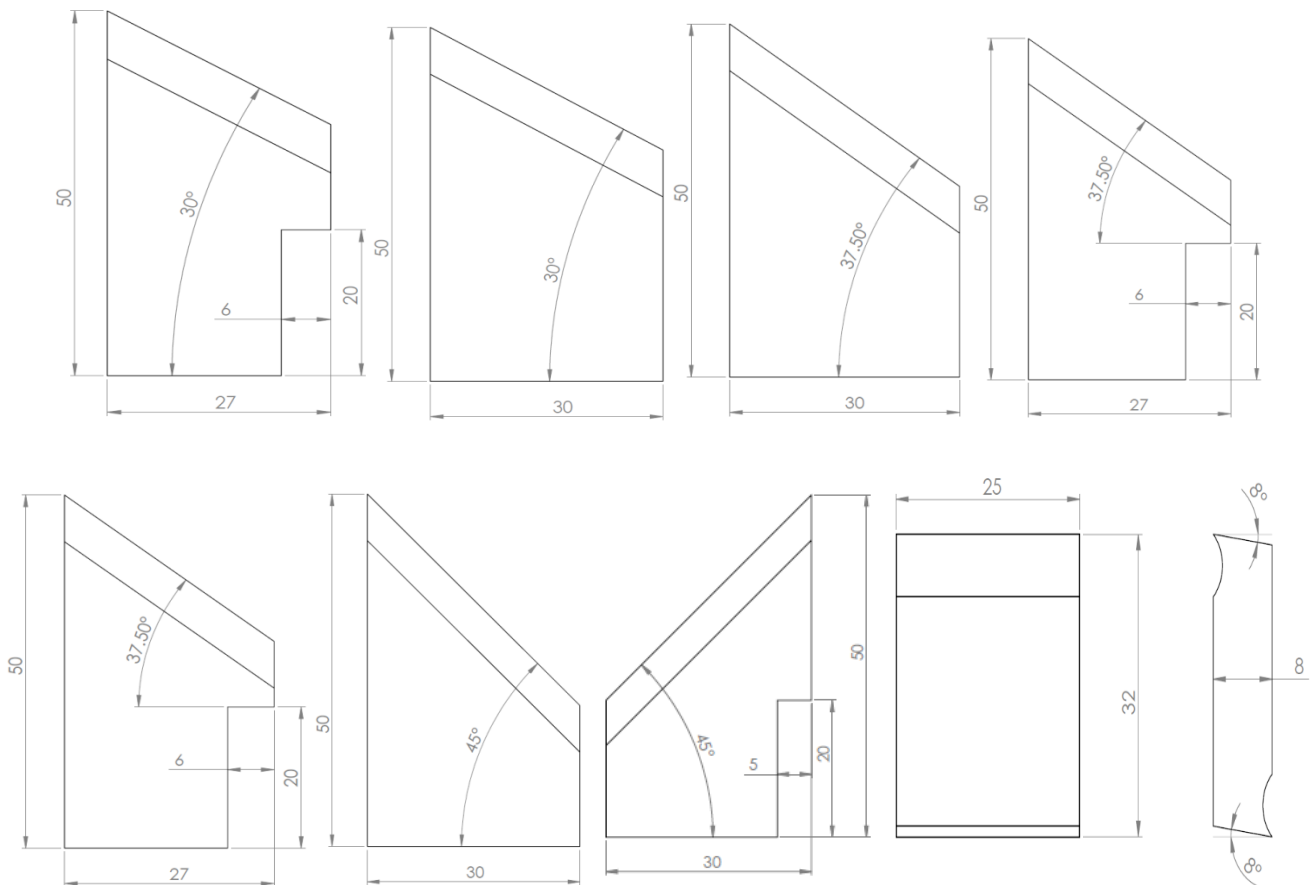

PNEUMATIC EXPANSION DRIVES



PNEUMATIC ROLLING DRIVES

MODEL	FREE SPEED RPM	MIN. TORQUE NM	MAX. TORQUE NM	TUBE CAPACITY INCH	AIR CONSUMPTION	AIR PRESSURE KG.	WEIGHT
850-400	400	5.0	36.0	1.1/4	1700	6-8	4.8
850-600	600	2.50	21.8	1	1700	6-8	4.8
850-1250	1250	1.6	12.2	3/4	1700	6-8	4.8
720-550	550	0.25	8.5	1/2	475	6	1.2



PNEUMATIC RIGHT ANGLE DRIVE

MODEL	FREE SPEED RPM	MIN. TORQUE NM	MAX. TORQUE NM	TUBE CAPACTY INCH	SQUARE DRIVE INCH	AIR PRESSURE KG.	WEIGHT
72-RT-90	90	200	410	4	3/4	6-8	6.7
72-RT-190	190	95	190	2.5	5/8	6-8	5.8

MORE PRODUCT LIST:-

- **FLANGE FACING MACHINES**
- **PLATE BEVELLING MACHINES**
- **PNEUMATIC EXPANSION DRIVES**
- **ELECTRIC EXPANSION DRIVES**
- **ELECTRIC CONTROL PANNELS**
- **HYDRULIC TORQUE TOOLS**
- **PNEUMATIC TORQUE TOOLS**
- **BOLT TENSIONERS**
- **NUT SPLITTERS**
- **TUBE TOOLS**

For Detail Enquiry Please Contact:-

NISTUL MACHINES PVT.LTD.

POLE NO 19.
NAVASIBAI COMPOUND,
MANPADA, GHOD BUNDER ROAD,
THANE (W) -400607

09920519568

08828127015

07718915149