



• Recess - Diffuser Down light

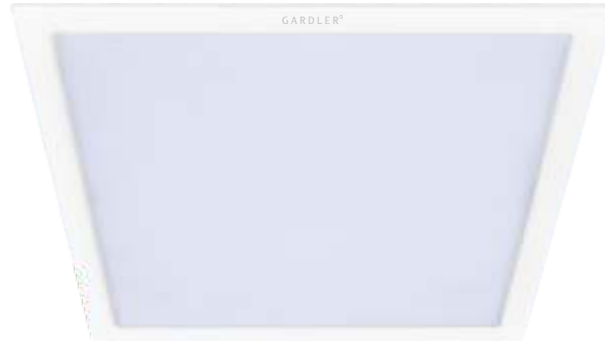

80 CRI


## PRODUCT HIGHLIGHTS

- Aesthetically designed high performance circular recess down light luminaire
- The complete luminaire is made of die cast aluminium
- Highly efficient passive cooling die-cast aluminium heat sink housing
- High efficiency polycarbonate symmetric light distribution diffuser
- High efficacy SMD (Mid Powder) led mounted on MCPCB for better thermal performance
- Isolated-high efficiency electronic driver with suitable electrical connector
- Heavy gauge spring toggle for easy installation on false ceiling application
- Shade : powder coated-white, black



## TECHNICAL SPECIFICATIONS

Light Source	: MPL - Mid Power Led
Power Consumption	: 15W, 20W, 24W
Color Temperature	: 3000 K   4000 K   6500 K
Lumens	15W : 1309 lm, 1333 lm, 1386 lm
	20W : 1665 lm, 1724 lm, 1825 lm
	24W : 1923 lm, 2066 lm, 2420 lm
Driver	: Constant current AC - DC
Input voltage range	: 110 - 270 V
Output voltage	: 42V - 74V DC
Output Current	: 250 mA   275 mA   300 mA
Power Factor	: >0.98
THD	: <15%

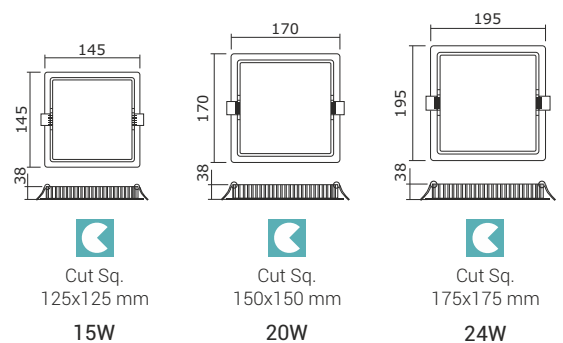

All dimensions are in mm

**Product Application :**  
Retail Space | Ambient | Trial Room | Stair case