


• Pendant - Hi bay down light



80 CRI


## PRODUCT HIGHLIGHTS

- Pendant mount - down light luminaire
- Luminaire housing made out of die cast aluminium, powder coated
- Best in class LED with high levels of efficiency and colour rendering
- Efficient electronics mounted in isolated driver compartment with connectors
- Better efficiency lens for lesser transmission loss
- Good efficiency aluminium passive heat sink
- High quality reflector silver anodized aluminium
- High quality - eye bolt or anchor fastener based suspension  
Beam angle : 60°, 90° & 120°
- Finished colour : Black



## TECHNICAL SPECIFICATIONS

Light Source	: COB - Chip on Board
Power Consumption	: 71w, 84w, 100w, 131w, 148w
Color Temperature	: 6500 K
Lumens	71w : 8900 lm
	84w : 10070 lm
	100w: 11535 lm
	131w: 13840 lm
	148w: 15005 lm
Driver	: Constant current AC - DC
Input voltage range	: 220 - 240 V
Output voltage	: 33V - 37V DC
Output Current	: 1900 mA   2200 mA   2600 mA   3300 mA   3700 mA
Power Factor	: >0.98
THD	: <15%

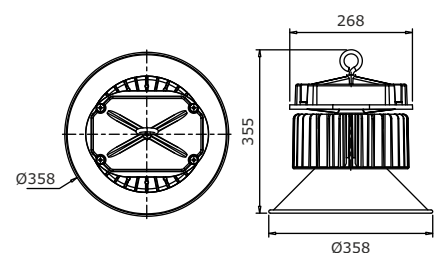

All dimensions are in mm

Product Application : Factory | Warehouse