


• Pendant - Hi bay down light



80 CRI


PRODUCT HIGHLIGHTS

- Pendant / Surface mounted-high bay luminaire
- Luminaire housing made out of die cast aluminium, powder coated
- High efficacy SMD LED-higher lm/W and good colour rendering
- Efficient electronic driver mounted in isolated compartment with connectors
- High efficiency lens for lesser transmission loss
- Good efficiency aluminium passive heat sink
- Beam angle : 90°, 120°
- Finished colour : Black



TECHNICAL SPECIFICATIONS

Light Source	: COB - Chip on Board
Power Consumption	: 50w, 100w, 150w, 200w
Color Temperature	: 6500 K
Lumens	50w : 5500 lm
	100w : 11000 lm
	150w : 16500 lm
	200w : 22000 lm
Driver	: Constant current AC - DC
Input voltage range	: 100 - 240 V
Output voltage	: 33V - 37V DC
Output Current	: 1900 mA 2200 mA 2600 mA 3300 mA 3700 mA
Power Factor	: >0.98
THD	: <15%

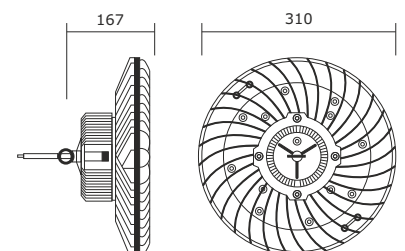

All dimensions are in mm

Product Application : Factory | Warehouse