

• Pendant - Hi bay down light



80 CRI


## PRODUCT HIGHLIGHTS

- Aesthetically designed high performance linear high bay luminaire
- Luminaire housing made of high-grade extruded aluminum
- Highly efficient passive cooling extruded aluminium heat sink
- High efficacy SMD (Mid Powder) led integrated with highly
- Efficient metal core PCB for higher thermal conductivity
- Inbuilt high efficiency electronic driver technology
- High efficiency lens optic for lesser transmission loss
- Beam angle : 90° & 120°
- Shade : powder coated-black / grey



## TECHNICAL SPECIFICATIONS

Power Consumption	: 71w, 84w, 100w, 131w, 148w
Color Temperature	: 6500 K
Lumens	100w : 11435 lm
	150w : 17757 lm
	200w : 22900 lm
	250w : 28900 lm
Driver	: Constant current AC - DC
Output Current	: 1900 mA   2200 mA   2600 mA   3300 mA   3700 mA

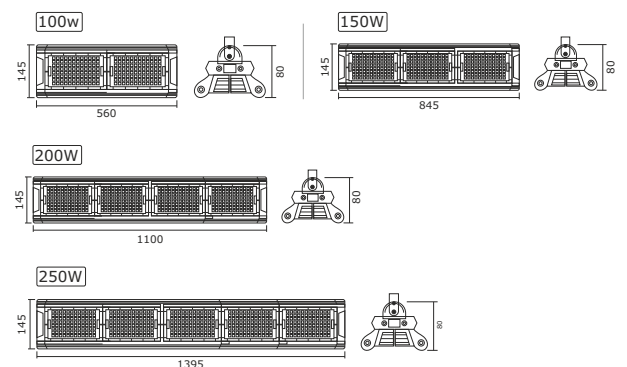

All dimensions are in mm

Product Application : Factory | Warehouse