




Pendant mount - Down light

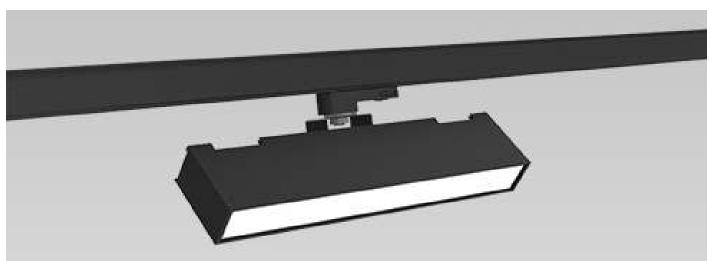

**90 CRI** 

## **PRODUCT HIGHLIGHTS**

- Aesthetically designed linear profile power track single luminaire for down & wall washing application
- Luminaire housing made from high-grade extruded aluminum
- High efficiency passive cooling technology for good thermal management
- High efficiency polycarbonate symmetric diffuser
- High efficacy SMD (High Power) LED integrated with highly efficient metal Core PCB for higher thermal conductivity
- Inbuilt-high efficiency electronic driver technology
- Adaptor-suitable for 4 wire power track
- Shade: powder coated-white, black & grey





Available Colours

White Black

## **TECHNICAL SPECIFICATIONS**

Power Consumption	: 25w
Color Temperature	: 3000 K   4000 K   6000 K
Lumens	: 2904 lm
Beam Angle	: Diffused





**Product Application:** Retail Space | Hyper / Supermarkat