

• Recess - Adjustable spot light



90 CRI

PRODUCT HIGHLIGHTS


- Aesthetically designed high performance recess-adjustable wall washer luminaire
- The complete luminaire is made of die cast aluminium
- High efficient passive cooling die-cast aluminium light head
- The light head rotatable 350° and adjustable 45°
- Aesthetically designed anti glare ABS front ring.
- High efficiency vacuum metalized polycarbonate reflector with beam angle options of 12°, 24°, 36°, 60°
- High efficacy chip on board (COB) LED technology
- Isolated - high efficiency electronic driver technology
- Heavy gauge spring toggle for easy installation on False ceiling application
- Shade : powder coated-white, black & grey

Available Colours




White Black Grey

Available Reflector Deg.



TECHNICAL SPECIFICATIONS

Light Source	: COB - Chip on Board
Power Consumption	: 15w, 20w, 23w, 27w, 29w, 32w, 35w, 38w, 40w
Color Temperature	: 3000 K 3500 K 4000 K
Lumens	15W : 1590 lm, 1685 lm, 1699 lm
	20W : 1935 lm, 2058 lm, 2085 lm
	23W : 2274 lm, 2392 lm, 2419 lm
	27W : 2540 lm, 2605 lm, 2640 lm
	29W : 2939 lm, 3123 lm, 3192 lm
	32W : 3002 lm, 3235 lm, 3299 lm
	35W : 3295 lm, 3549 lm, 3618 lm
	38W : 3443 lm, 3589 lm, 3697 lm
40W : 3635 lm, 3876 lm, 3890 lm	
Driver	: Constant current AC - DC
Input voltage range	: 220 - 240 V
Output voltage	: 33V - 37V DC
Output Current	: 400 mA 500 mA 600 mA 700 mA : 750 mA 800 mA 900 mA 950 mA
Power Factor	: >0.98
THD	: <10%

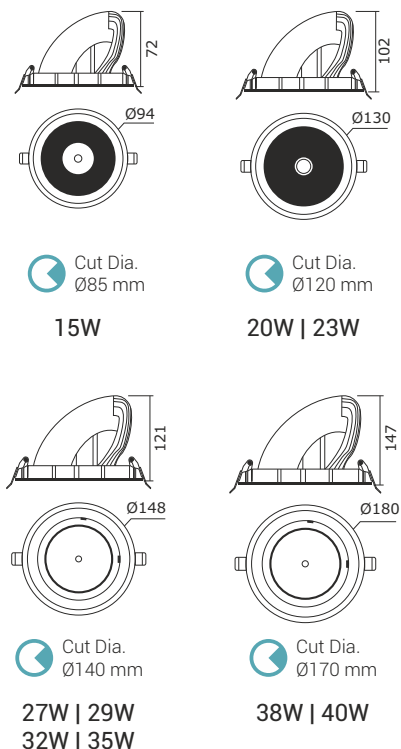

All dimensions are in mm

Product Application :
Retail Space | Peripheral | Show Window | Wall Display