




www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COPPER PIN TYPE TERMINAL ENDS FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS SUITABLE FOR CONTACTORS SWITCHES AND TERMINAL BLOCKS.

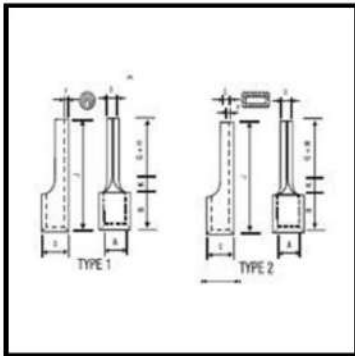


Area mm <sup>2</sup>	Cable Size	A	C	D	F	E	B	G+H	J	Type	Swastik Cat No.
1.5	1/1.40	1.6	3.2	1.9	0.8		5	10	17	I	WP09
1.5	1/1.40	1.6	3.2	3.1	0.8		5	10	17	II	WP35
2.5	3/1.06	2.3	3.9	1.9	0.8		5	10	17	I	WP01
2.5	3/1.06	2.3	3.9	3.1	0.8		5	10	17	II	WP02
4	7/0.85	2.9	4.9	2.7	1.0		6	10	20	I	WP03
4		3.6	5.6	5.1	1.0		6	10	20	II	WP04
6	7/1.06	3.6	5.6	2.7	1.0		6	10	20	I	WP05
6		4.0	6.0	2.7	1.0		6	10	20	I	WP06
10	7/1.4	4.5	6.7	4.3	1.1	24	8	10	20	III	WP07
16	7/1.7	5.8	8.2	5.5	1.2	25	10	10	20	III	WP08



www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COPPER PIN TYPE TERMINAL ENDS (INSULATED) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS

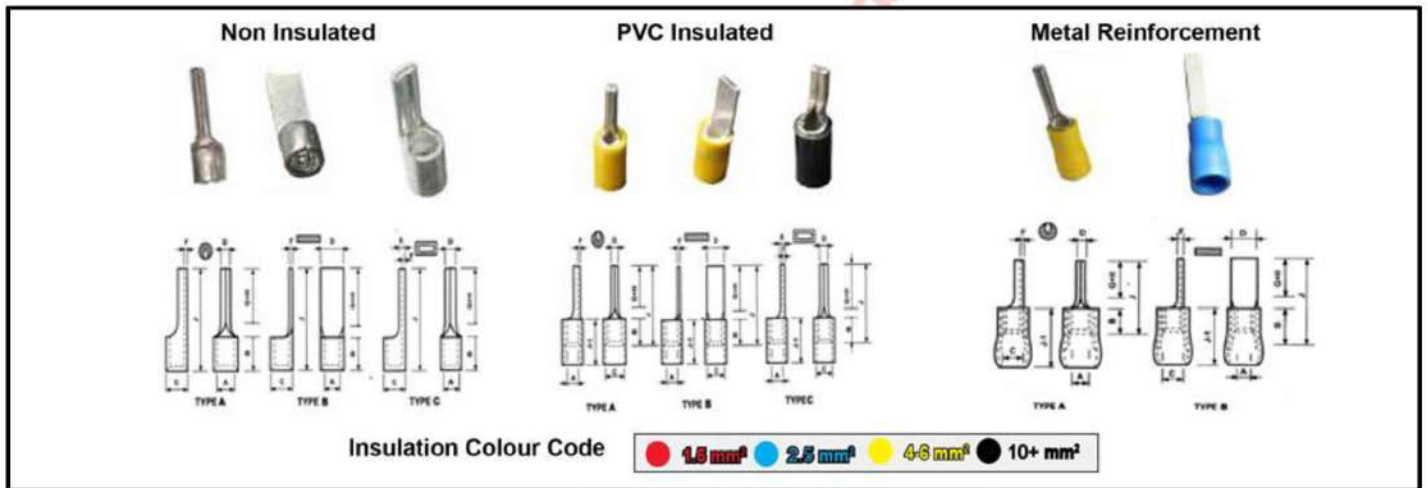

### COLOUR CODING OF INSULATION SLEEVE


SIZE:	1.5	2.5	4.6	10	16
COLOUR:	RED	YELLOW	BLUE	BLACK	BLACK

Area mm <sup>2</sup>	A	C	D	F	E	B	G+H	J	C-1	J-1	Type	Swastik Cat No
1.5	1.6	3.2	1.9	0.8		5	10	17	4.8	10	I	WPI 17
1.5	1.6	3.2	3.1	0.8		5	10	17	4.8	10	II	WPI 40
2.5	2.3	3.9	1.9	0.8		5	10	17	5.5	10	I	WPI 18
2.5	2.3	3.9	3.1	0.8		5	10	17	5.5	10	II	WPI 19
4	2.9	4.9	2.7	1.0		6	10	20	7.1	14	I	WPI 20
4	3.6	5.6	5.1	1.0		6	10	20	7.1	14	II	WPI 21
6	3.6	5.6	2.7	1.0		6	10	20	7.1	14	I	WPI 22
6	4.0	6.0	2.7	1.0		6	10	20	7.9	14	I	WPI 23
10	4.5	6.7	4.3	1.1	2.4	8	10	20	7.9	16	III	WPI 24
16	5.8	8.2	5.5	1.2	2.6	10	10	20	10.0	20	III	WPI 25



www.swastiklugs.in  
spsslugs@yahoo.in

## Swastik Copper Pin type Terminal ends (Insulated with Metal Reinforcement) for solder less Crimping to Copper / Aluminum Conductors Colour Coding of Insulation Sleeve

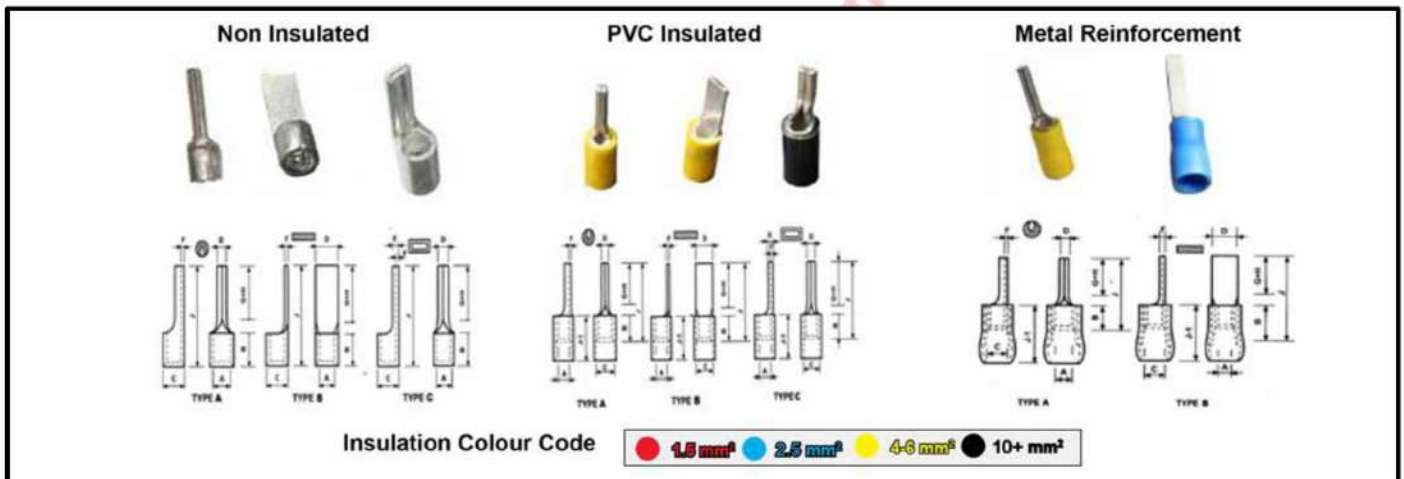

### COLOUR CODING OF INSULATION SLEEVE

<b>SIZE:</b>	<b>1.5</b>	<b>2.5</b>	<b>4.6</b>
<b>COLOUR:</b>	<b>RED</b>	<b>BLUE</b>	<b>YELLOW</b>

Area mm <sup>2</sup>	A	C	D	F	B	G+H	J	J-1	A-1	C-1	C-2	Type	Swastik Cat No.
1.5	1.6	3.2	1.9	0.8	5	10	17	10	3.6	4.8	5.4	I	WPR26
2.5	2.3	3.9	1.9	0.8	5	10	17	10	4.4	5.4	6	I	WPR27
2.5	2.3	3.9	3.1	0.8	5	10	17	10	4.4	5.4	6	II	WPR28
4	2.9	4.9	2.7	1.0	6	10	20	15	6.4	7.2	8.6	I	WPR29
4	3.6	5.6	5.1	1.0	6	10	20	15	6.4	7.2	8.6	II	WPR30
6	3.6	5.6	2.7	1.0	6	10	20	15	6.4	7.2	8.6	I	WPR31
6	4.0	6.0	2.7	1.0	6	10	20	15	6.4	7.2	8.6	I	WPR32

**Tolerance = ± 5%**