




Expanding Digital Technologies



## 3IC - 4OUTPUT NODE MODEL NO. 5050

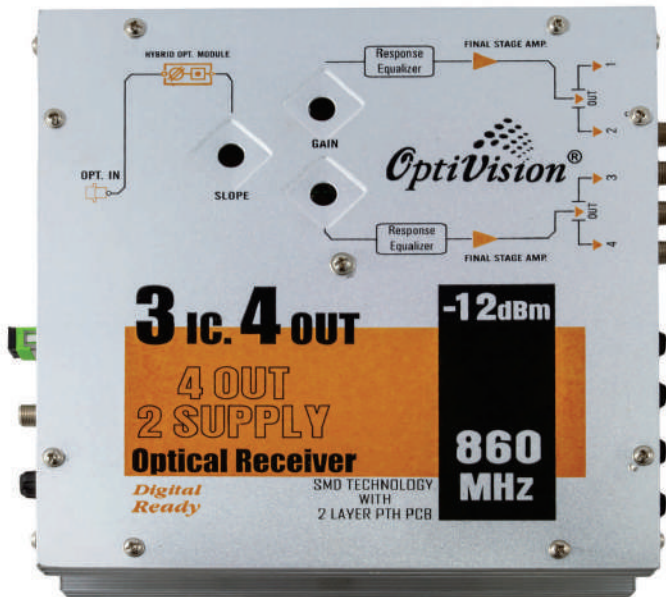

### Description :-

Optivision Model no.5050 is Aluminium optical Receiver with 3IC 4Out in which it has 1 High Linearty Photo Diode module & 2 Low noise GaAs amplifier module gives 4 Out with high-output, high performance, full-featured CATV optical node designed in SMD components the very latest optical receiver technology to delivera reliable & full performance of multiplexed video. The unit is big aluminium casing for maximum heat Dissipation. This unit is constructed with high quality components to enable it to meet or exceed its performance specifications over a wide temperature range in an uncontrol environment.

 Wave length 1200nm - 1600nm	 RF Output Level 110dBµv	 ECO FRIENDLY	 ATTEUNATION -20dB	 High Responsive Optical Module
 Optical Input +2dBm ~ -16dBm	 Linear 1000MHz	 Dual Power 220VAC / 60VAC	 GaAs IC MODULE	 HD + DIGITAL READY