


# DIAL SNAP GAUGE



DS25

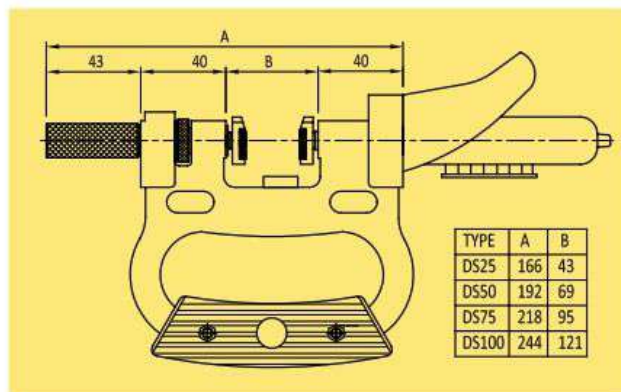

Note: Supplied **without** dial indicator

Type	Measuring Range (mm)
DS25	0-25
DS50	25-50
DS75	50-75
DS100	75-100

## FEATURES

- Designed for quick GO / NOT GO gauging of diameters of cylindrical parts either in process or post process
- Adjustable spindle & sensing spindle are manufactured out of graded steel
- Spindles are hardened and ground including screw threads
- Carbide ground and lapped tip of measuring faces ensures maximum wear resistance
- For quick entry, chamfer provided on front edges
- Constant measuring force, which is a result of an in-bulit spring, eliminates user error
- For easy reading, the dial indicator can be rotated and locked
- Best suited for inspection of continuous / Batch production items
- Setting is done with the help of Gauge Blocks / Cylindrical setting Masters
- Any standard Dial indicator with  $\varnothing 8$  h6 mm holding shank can be fitted easily
- Also used with Electronic probe & digital dial gauge

## Application

For measuring quick & accurate measurement of all kinds of Outer Diameter up to 100 mm