


Expandable, Braided, Polyester Sleeving Product Facts

- Excellent abrasion and cut through resistance
- Lightweight
- Flexible (even at low temperatures)
- Fungus proof
- Not affected by most chemical and solvents, non-hygroscopic
- Versaflex-FR sleeving meets UL VW-1 and is self extinguishing
- Wide range of sizes available
- RoHS compliant

Versaflex

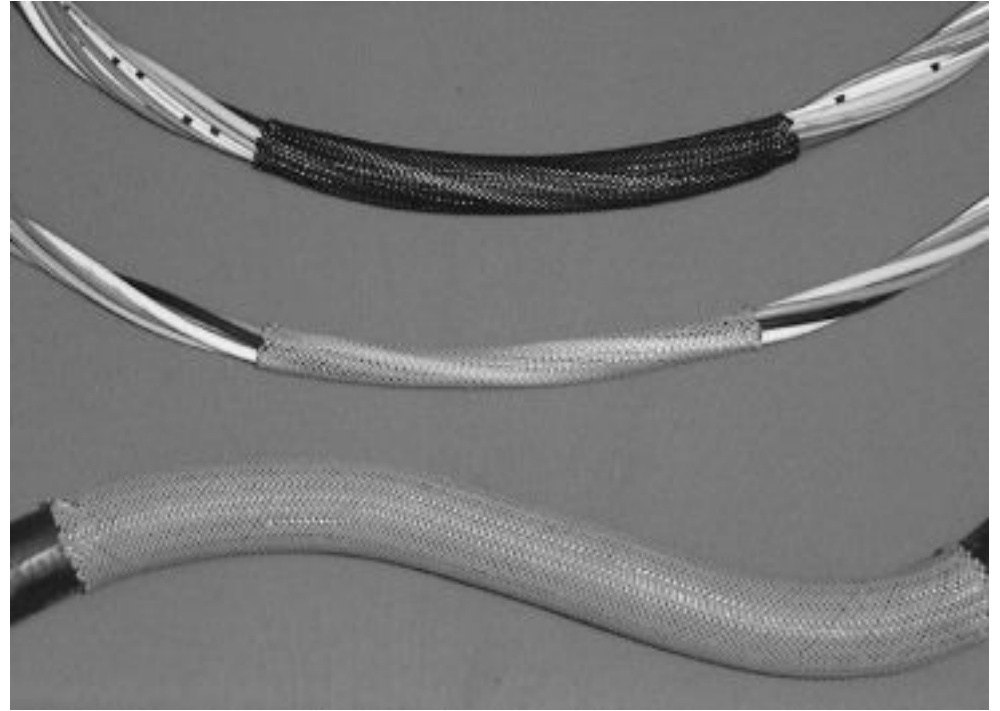

Applications

Versaflex sleeving is suited for the mechanical protection of wire harnesses, hoses, and all other applications where exceptional flexibility combined with superior abrasion/cut resistance is required. It also serves as an economical

means for wire bundling that will not trap heat or moisture; expanding easily to fit over irregular shapes, then contracting to conform and grip. To prevent fraying, these products should be cut to length using a hot knife.

Installation

This product is cold applied.

Operating Temperature Range

-50°C to 150°C [-58°F to 302°F] (220°C [-58°F to 302°F] for short periods)

Specifications/Approvals

Series	UL	Raychem
Versaflex-FR	E306976 VW-1, 125°C	
Versaflex	—	RK-6772

RAYCHEM Tubing Products

DIMENSION DETAILS:

Data Sheet No:								Date:	
Tubular Braid Construction									
SI No	Paras Part Number	Former Size mm	No of Spindles	No of Wires/S pindle	Individual strand size AWG	Min Coverage %	Overall OD Min	Overall OD Max	Weight of TCCA gm/mtr
1	60206004240509	3.0	24	5	36	90	3.60	4.50	10.70
2	60206008240609	5.0	24	6	36	90	5.20	6.20	12.84
3	60206125241609	6.5	24	16	36	90	6.80	7.60	34.23
4	60206126480809	9.5	48	8	36	90	10.00	11.00	34.23
5	60206006240709	4.0	24	7	36	96	4.20	5.00	14.98
6	60206009240909	6.0	24	9	36	96	6.40	7.20	19.26
7	60206127241409	7.5	24	14	36	96	8.02	8.82	29.95
8	60206015361509	10.0	36	12	36	96	10.52	11.32	38.51
9	602060128361509	12.5	36	15	36	96	13.02	13.82	48.14
10	60206021361609	15.0	36	16	36	96	15.52	16.32	51.35
11	60206027481609	20.0	48	16	36	96	20.52	21.32	68.47

Ordering Information

Color	Standard	Versaflex (metric) : Black (-0) Grey (-8) Versaflex (imperial) : Black (-0) Versaflex-FR : Black with a white X tracer (-09)
Standard packaging	On spools.	
Ordering description	Specify product name, size and color (for example, VERSAFLEX-FR-1/4-09-SP)	

parasflexicon.com | admin@paraswires.net

Plot 17Q, Sector 1, phase 2, KIADB Industrial Area, Bidadi, Ramnagara Dist. 562109, India.

Contact : +91 8197777905, +91 9945794072