


EARTHING EQUIPMENTS

EARTH RODS

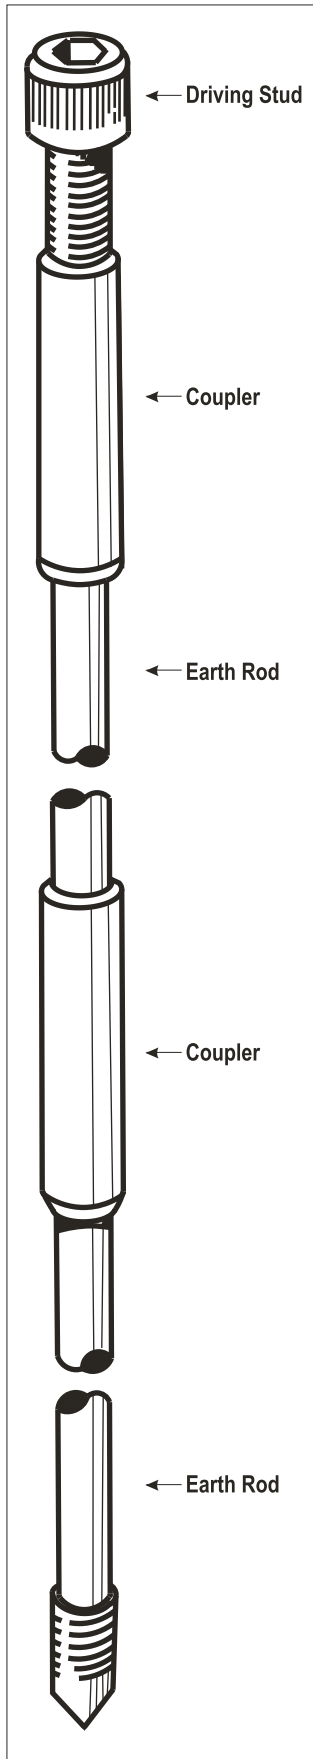

PURE COPPER EARTH ROD (Externally threaded)

STAR solid copper earth rods are made from high conductivity hard drawn copper to BS 2874 - C101. They are ideally suitable where soil conditions are very corrosive, such as soil with high salt and moisture content. These rods are also available with tin plating in order to reduce the risk of oxidation and increasing shelf life. Threads on the rods are formed by roll threading process giving extra strength to the threads and eliminating risk of chipping of threads while driving the rod in the ground.

Rod DIA. mm	Total Length	Thread Dia	Cat. #
9.5	1200	UNTHREADED	SRC912
12.5	1200	9/16"	SRC1412
12.5	1500	9/16"	SRC1415
12.5	1800	9/16"	SRC1418
12.5	2400	9/16"	SRC1424
12.5	3000	9/16"	SRC1430
14.2	1200	5/8"	SRC1612
14.2	1500	5/8"	SRC1615
14.2	1800	5/8"	SRC1618
14.2	2400	5/8"	SRC1624
14.2	3000	5/8"	SRC1630
17.2	1200	3/4"	SRC2012
17.2	1500	3/4"	SRC2015
17.2	1800	3/4"	SRC2018
17.2	2400	3/4"	SRC2024
17.2	3000	3/4"	SRC2030

COUPLING

Made up of Copper Alloy for higher strength and counter bored to protect the rod threads from damage.

Thread Dia	Cat. #
9/16"	SBC916
5/8"	SBC58
3/4"	SBC34

DRIVING BOLT

Made up of Re-usable high tensile steel. Can be used many times over and suitable for power hammering.

Thread Dia	Cat. #
9/16"	SDB916
5/8"	SDB58
3/4"	SDB34

