

C.I. Casting


Steel Body

Steel Body

## VERTICAL BANDSAW MACHINE

### SPECIFICATION


Model	201-202	203	204	205	206	207	208
Wheel Diameter	12"	18"	24"	30"	36"	39"	42"
Width of Wheel	1½"	2"	2"	2½"	3"	3"	3"
Size of Table	17"×17"	21"×23"	27"×28"	35"×36"	40"×42"	41"×43"	41"×43"
Height from Floor to Table	35"	21"	28"	33"	37"	38"	39"
Depth of cut	8"	12"	17"	22"	25"	27"	31"
Distance from saw Blade to Frame	12"	15"	21"	27"	32"	36"	38"
HP. Required	2 H.P.	2 H.P.	5 H.P.	7½ H.P.	10 H.P.	12½ H.P.	15 H.P.

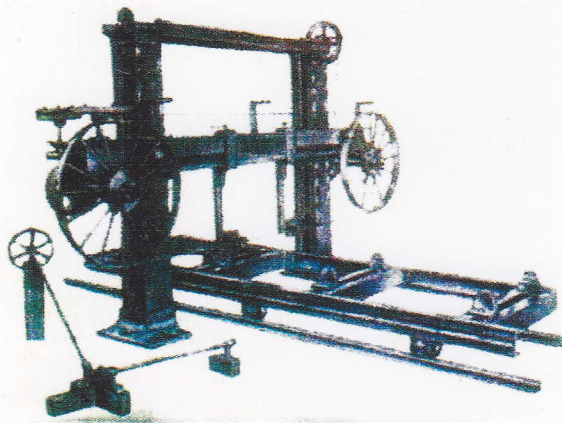

## HORIZONTAL BANDSAW MACHINE

### SPECIFICATION

Model	209	210
Size	39"	42"
Size of Saw Wheels	39"×3" 14 spokes	42"×3" 16 spokes
Thickness of the Saw wheel	¾"	¾"
Distance between Pillars	6'-0"	6'-6"
Maximum Cut	4'-9"	5'-3"
Size of Carriage	12'×3'-9" 6 wheels with 4	12'×3'-9" 6 wheels with 4
Channel Size	Jaw Vice	Jaw Vice
Length of Rail	10"	10"
Length of Saw Blade recommended	60'	72'
H.P. Required	30' 12.5 H.P./1440 R.P.M.	32' 15 H.P./1440 R.P.M.

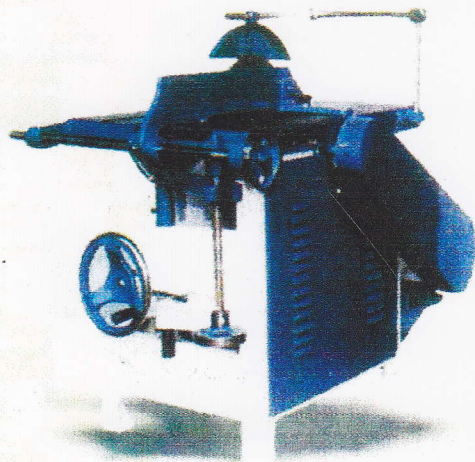

## CIRCULAR SAW STRAIGHT RISE FALL & TILTING TABLE

### SPECIFICATION

Model	216	217	218	219	220
Size	8"	12"	18"	24"	30"
Table Size	16"×22"	27"×20"	30"×20"	42"×24"	30"×60"
Table Height	24"	24"	30"	30"	30"
Spindle Dia	¾"	1"	1"	1¼"	1¼"
Depth of Cut	2½"	3½"	5"	8½"	10"
Spindle Speed R.P.M.	2800	3000	2000	1000	1000
Electric Motor Power	½ H.P.	1 H.P.	3 H.P.	5 H.P.	7.5 H.P.

## TILTING ARBOUR CIRCULAR SAW MACHINE

### SPECIFICATION

Model 220-A			
Max. Circular Saw Dia Meter	14"	18"	24"
Work Table Size	36"×30"	40"×42"	40"×42"
Max. Depth of Cut	4 ¼"	5"	8"
Arbour Tilt	45 Deg	45 Deg	45 Deg
Power Required HP/RPM	2/1440	3/1440	5/1440

Standard Accessories Metre Gauge, Moter Pulley and Moter Plate

