

DH-DVR0404/0804/1604LF-AS

4/8/16 Channel D1/2CIF/CIF Mini 1U DVR



Features

- > Up to 4/8/16 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > DVR0404LF-AS: All channel D1(4CIF)
- > DVR0804LF-AS: All channel 2CIF or 2ch D1 & 6ch CIF
- > DVR1604LF-AS: All channel CIF
- > HDMI / VGA / TV simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-DVR0404/0804/1604LF-AS

Specifications


Model		DH-DVR0404LF-AS	DH-DVR0804LF-AS	DH-DVR1604LF-AS
System				
Main Processor		Embedded microprocessor		
Operating System		Embedded LINUX		
Video				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard		NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio				
Input		1 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Same with audio input channel 1		
Display				
Interface		1 HDMI, 1 VGA, 1 TV, BNC(1.0Vp-p, 75Ω)		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split		1/4	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264 / G.711		
Resolution		D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream:	D1(1~25/30fps)	2ch@D1+6ch@CIF (1~25/30fps)	CIF (1~25/30fps)
	Extra Stream	QCIF(1~25/30fps)		
Bit Rate		48~4096Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm				
Trigger Events		Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input		4 channel	8 channel	16 channel
Relay Output		1 channel		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode		USB Device / Network		

DH-DVR0404/0804/1604LF-AS

Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, Alarm Server
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 4TB
Auxiliary Interface	
USB Interface	2 ports (1 Rear), USB2.0
RS485	1 port, For PTZ control
Environmental	
Power Supply	DC12V / 2A
Power Consumption	10W(without HDD)
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa
Dimension(W×D×H)	Mini 1U, 325mm×240mm×45mm
Weight	1.5KG(without HDD)

DH-DVR0404/0804/1604LF-AS

System Connection

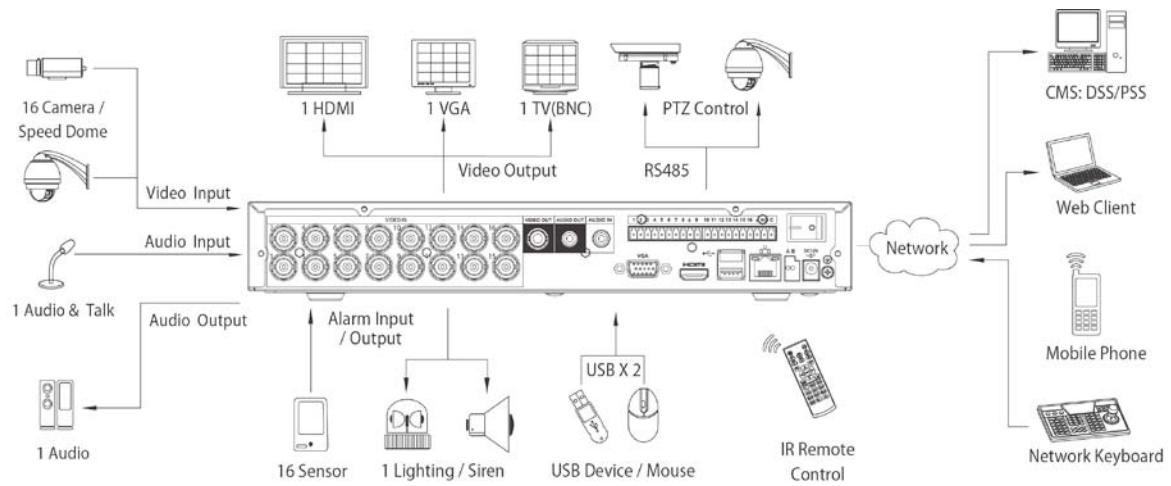

Take DVR1604LF-AS as an example

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.