



## Acrylic Distemper

### PRODUCT DESCRIPTION

Indigo Acrylic Distemper is a water based Interior paint which gives matt finish to walls.



### PERFORMANCE FEATURES & BENEFITS



Durable

Matt Finish

#### FINISH

**MATT**

GLOSS

#### WASHABILITY

NO

**LOW**

MEDIUM

HIGH

### RECOMMENDED USES

#### AREA



INTERIOR



EXTERIOR

#### SURFACES

Plaster Walls

### APPLICATION DETAILS & SURFACE PREPARATION

#### MIXING



Shake well before use

#### TOOLS



Brush & Roller

#### THINNING



Water

#### THINNING RATIO



50-60% by Volume

#### SURFACE DRYING TIME



Surface Dry in 20 Min.

#### FILLING



Indigo Polymer Putty or Acrylic Wall Putty

#### APPLICATION ENVIRONMENT



Temperature: 10-40 Degree  
Humidity: Below 70%

#### CLEANING



Remove all loose and flaking particles, and rub with sand paper. Ensure that the surface is clean and dry.

#### SURFACE PREPARATION



Newly plastered surfaces should be allowed to mature for a minimum period of 6 months before painting.

#### APPLICATION



Apply one coat of Indigo Cement Primer. After filling up dents with a layer of Indigo Polymer Putty, apply another coat of Cement primer. Apply 2-3 coats of Indigo Acrylic Distemper, obtained by thinning 1 Kg of distemper with 500-600 ml of water.

#### SAFETY FEATURES



Non- flammable  
No added Lead, Mercury or Chromium compounds

## TECHNICAL DATA

<b>Coverage</b>	1st Coat-110-120 sq.ft/Kg* 2nd Coat- 60-70 sq.ft/Kg *
<b>Drying Time</b>	4-6 Hrs
<b>Sheen level</b>	2.3 at 60 degree
<b>Flash point</b>	NA
<b>Stability of thinned paint</b>	NA
<b>Appearance</b>	Semi Solid
<b>Solids</b>	67
<b>Specific gravity</b>	1.63
<b>Recommended DFT</b>	NA
<b>Viscosity @25°C by Stormer Viscometer</b>	430 psi by Penetrometer
<b>Pot life</b>	24 hrs
<b>Shelf life</b>	24 months
<b>Contrast ratio</b>	99.7

\*Practical Spreading Rate will vary from the quoted Theoretical Spreading Rate due to factors such as method and condition of application as well as surface roughness.

## PRECAUTIONS


Do not apply when the ambient temperature below 10°C. Do not apply directly on Lime wash or White cement painted wall

## POST APPLICATION INSTRUCTIONS

NA

## AVAILABLE PACK SIZE

Available in:

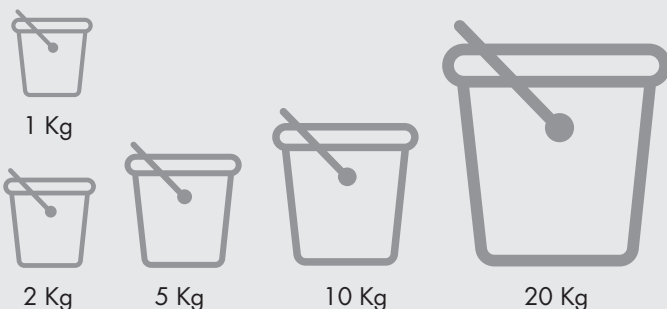

## SHADE RANGE

As per Shade Card

