



WTC Primer

PRODUCT DESCRIPTION

Indigo Water thinnable Cement Primer is a water-based under coating to an emulsion paint and is suitable for application on interior walls.



PERFORMANCE FEATURES & BENEFITS

1. Easy to apply
2. Good Coverage
3. Economical

FINISH

MATT

GLOSS

WASHABILITY

NO

LOW

MEDIUM

HIGH

RECOMMENDED USES

AREA



INTERIOR



EXTERIOR

SURFACES

Exterior cement plasters, exterior ceilings, asbestos sheets, concrete etc. as an undercoat.

APPLICATION DETAILS & SURFACE PREPARATION

MIXING



Shake well before use

TOOLS



Brush

THINNING



Water

THINNING RATIO



90-100% by Volume

SURFACE DRYING TIME



Surface Dry in 30 Min.

FILLING



Indigo Polymer Putty or Acrylic Wall Putty

APPLICATION ENVIRONMENT



Temperature: 10-40 Degree
Humidity: Below 80%

CLEANING



Remove all dust, dirt, chalking, oil, grease, loose particles and all other contamination. Any previous growth of fungus, algae should be removed by wire mesh and clean with water.

SURFACE PREPARATION



NA

APPLICATION



Apply 1-2 coats depending on surface condition.

SAFETY FEATURES



Non- flammable
No added Lead, Mercury or Chromium compounds

TECHNICAL DATA

Coverage	1 coat-100-140 sq.ft/Lt.*
Drying Time	4-5 Hrs
Sheen level	2.0 at 60 degree
Flash point	NA
Stability of thinned paint	24 Hrs
Appearance	Smooth, Liquid, White
Solids	51.7 %
Specific gravity	1.41
Recommended DFT	NA
Viscosity @25°C by Stormer Viscometer	2400 CP
Pot life	24 hrs
Shelf life	24 months
Contrast ratio	93.89

**Practical Spreading Rate will vary from the quoted Theoretical Spreading Rate due to factors such as method and condition of application as well as surface roughness.*

PRECAUTIONS

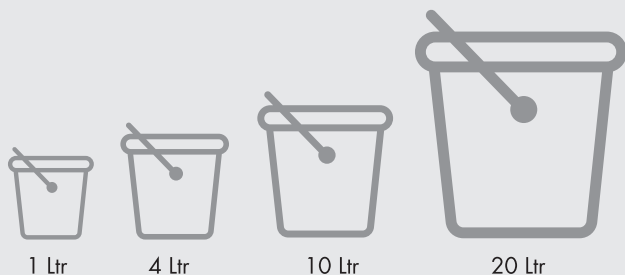
Do not leave primer without application of top coat

POST APPLICATION INSTRUCTIONS

Apply Indigo Emulsion on Primer

AVAILABLE PACK SIZE

Available in:

**SHADE RANGE**

White



INDIGO
Be surprised!